




Shindaiwa's DGA Series (Red Top Series) sound-attenuated mobile generators are the quietest mobile generators on the market, thanks to an uncompromising commitment to sound suppression.

FEATURES

- All Red Top generators exclusively use rugged, fuel-
- technology (as little as 51dB(A) @ 7 metres).
- Red Top generators are an engineered, lightweight and compact designed to fit into tight spaces.

- All engines meet current emission standards.
 With both single and three-phase protected outputs.
 Low oil pressure and high coolant temperature automatic
- shut-downs. Thermal relay opens main circuit breaker to protect thermal relay opens main circuit breaker to protect
- Durable all-weather outer enclosure with quality powder coated exterior and stainless steel fasteners throughout provide protection against corrosion
- Two-way tank valve for easy connection to auxiliary
- Up to 53 hours with Long Range Bunded (LRB) heavy duty fuel tanks (dependant on model).

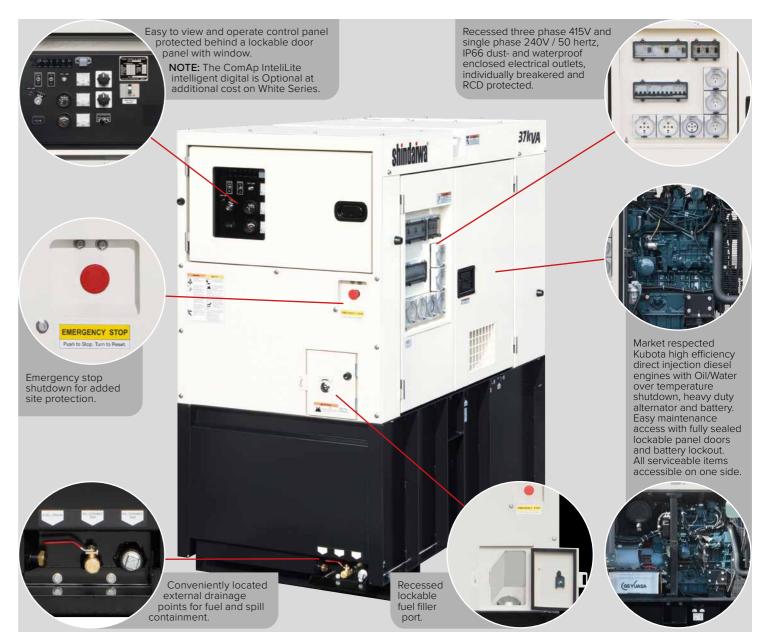

The DGMK Series (White Series) soundattenuated mobile generators combine design simplicity with uncompromising standards of engineering and manufacturing excellence.

FEATURES

- Rugged, Kubota diesel engines for exceptional fuel
- Quiet operation thanks to advanced sound-absorbing technology (as little as 58dB(A) @ 7 metres).
- Lightweight and compact to fit into tight spaces.
- · Provides both multiple single and three-phase outlets see specification.
- · Individually RCD protected outlets.
- Low oil pressure, high coolant temperature and charge automatic shut-downs.
- exterior and stainless steel fasteners throughout provide protection against corrosion.
- Two-way tank valve for easy connection to auxiliary
- Long Range Bunded fuel tank standard with up to 52 hours of operation (dependant on model).



RED SERIES











Electrical Data		DGA12DM	DGA20EM	DGA37CM	DGA50CM	DG1000MIM-ANZ
Rated frequency	Hz			50		
Rated voltage	V			415/240		
Rated output	kVA/kW	12/9.6	20/16	37/29.6	50/40	80/72
Rated current	А	16.7	28	51	69	116
Rated power factor				0.8 (Lagging)		
Outlets ^a (1 phase)		3 x 15A	3 x 15A	3 x 15A	3 x 15A	Bus Bar only
(3 phase)		1 x 20A	1 x 20A	1 x 20A / 2 x 32A	1 x 50A / 2 x 32A	Bus Bar only
Number of poles				4		

Engine						
Model		Kubota D1703	Isuzu 4LE1	Isuzu 4JG1T	Isuzu 4BG1T	Isuzu 6BG1T
Emissions rating		Tier 3 ¹	Interim Tier 4 ²	Tier 2 ¹	Tier 2 ³	Tier 2 ⁴
Air induction system		N/A	N/A	Turbocharged	Turbocharged	Turbocharged
Number of cylinders		3	4	4	4	6
Bore and stroke	mm	87 x 92.4	85 x 96	95.4 x 107	105 x 125	105 x 125
Displacement	L	1.647	2.179	3.059	4.329	6.494
Rated output	kW	12.4	19.1	35.4	48.5	73.1
Rated speed	RPM			1500		
Fuel				Diesel		
Fuel consumption ^b	L/Hr	2.6	3.9	7.8	8.3	18.2
Fuel capacity (Std.)	L	60	78	124	160	219
Fuel capacity (LRB)°	L	140	140	210	398	647
Lubrication volume	L	8.2	8.5	10	10	22
Sound level						

Dimensions and v	veightd					
Dimensions (LxWxH)	mm	1350x780x1140	1440×780×1140	1770x920x1350	2000x950x1430	2530x1000x1400
Dry weight	kg	693	699	1170	1431	1800

Physical characteristics				
Shutdowns	Oil pressure and water temperature lamp indication with shutdown			
Warnings	Battery charge with lamp indication			
Bunding ^c	Fully bunded to 130% of total fluids in machine			
Protection	Battery isolator and Emergency Stop			


- a. Outlet configurations shown here are standard. Outlet configurations are fully customisable to customer requirements.
- b. Fuel consumption figures are based on 75% load, as per industry standard specifications.
- c. When an optional long range bunded (LRB) fuel tank is fitted. d. Standard dimensions and weights. For LRB configurations, contact Shindaiwa.
- 2. EPA (USA)
- Voluntary Emission regulations for non-road engines in Japan by LEMA
- Voluntary Emission regulations for non-road engines in Japan by MLIT
 Voluntary Emission regulations for non-road engines in Japan by MLIT; EPA Tier 3 (USA)



Sound level @ 7 mtr dB(A)

Ultra-Quiet is a unique technology that minimises generator sound levels. An engineered enclosure, coupled with the insulated panels, redirects the cooling air. This doubles the

absorbing foam and hardware. The result is lower sound levels as well as increased unit rigidity. A specially tuned muffler, plus the longer internal exhaust pipe achieve an improved balance of

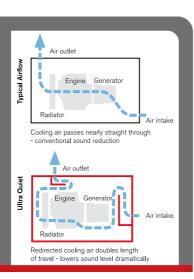

WHITE SERIES







Electrical Data		DG20MK-P/ANZ	DG37MK-P/ANZ	DG50MK-P/ANZ
Rated frequency	Hz		50	
Rated voltage	V		415/240	
Rated output	kVA/kW	20/16	37/29.6	50/40
Rated current	А	27.8	51.5	69.6
Rated power factor			0.8 (Lagging)	
Outlets ^a (1 phase)		3 x 15A	3 x 15A	3 x 15A
(3 phase)		1 x 20A	2 x 32A / 1 x 20A	1 x 20A / 1 x 32A / 1 x 50A
Number of poles			4	

Engine				
Model		Kubota V2403-K3A	Kubota V3800D-T	Kubota V3800DI-T (intercooled)
Emission rating	Tier	31	3 ²	3 ²
Air induction system		Direct injection	Direct injection	Direct injection
Number of cylinders		4	4	4
Bore and stroke	mm	87 x 102.4	100 x 120	100 x 120
Displacement	L	2.434	3.769	3.769
Rated output	kW	19.1	33.1	49.2
Rated speed	RPM		1500	
Fuel			Diesel	
Fuel consumption ^b	L/Hr	4.0	6.7	8.8
Fuel tank capacity	L	198	360	420
Lubrication volume	L	9.7	13.2	12.5

Sound level @ 7 mtr	dB(A)	62	58	57
Dimensions and weight				

Dimensions and weight					
	Dimensions (LxWxH)	mm	1500x700x1310	1175x880x1735	1970x880x1665
	Dry weight	kg	720	1191	1315

Physical characteristics			
Shutdowns	Oil pressure and water temperature lamp indication with shutdown		
Warnings	Battery charge with lamp indication		
Bunding	Fully bunded to 110% of total fluids in machine		
Protection	Battery isolator and Emergency Stop		
Auto start module	Direct Wire terminal block		

- $a. \ \ \text{Outlet configurations shown here are standard. Outlet configurations are fully customisable to}$ $b. \ \ \text{Fuel consumption figures are based on 75\% load, as per industry standard specifications.}$
- Voluntary Emission regulations for non-road engines in Japan by MLIT; Stage 3A (EU)
 Voluntary Emission regulations for non-road engines in Japan by MLIT

Accessories and optional fit ups

- Safety roll frame for easy on-site movement and added machine protection
- and containment of spillage
- Exhaust spark arrestor limits the possibility of site ignition

Sound level





About Shindaiwa

people who do.

Since our beginning decades ago, we have focused on designing and building the highest quality products for people who depend on us to make a living. To this day Shindaiwa power equipment has stayed true to that direction. The Shindaiwa brand is synonymous with leading edge Japanese design and engineering, high performance and durability around the world. This is proven time and again by testimonials from commercial customers who use our products under extremely harsh conditions. After years of reliable use, they come back for another Shindaiwa. Why? Because of the consistent quality and dependability they have come to expect.

Shindaiwa only builds equipment to one standard – professional. We manufacture products to suit the environment and the applications they will be used in. Each piece of equipment is as durable as we can make it. Our inhouse fabrication and special purpose powder coating facility ensures both enhanced aesthetics and great durability in the harsh Australian outdoors. We test our products in punishing conditions to ensure that they are capable of whatever you demand from them. So even if you don't use Shindaiwa equipment professionally, the products you buy are already being used by

shindaiwa®

Shindaiwa Welders - the perfect partner for commercial and industrial applications

Shindaiwa's range of mobile diesel-driven heavy duty DGW Welders series are a proven choice for mining, construction, rail, pipeline and other onsite applications. They are the choice of rental fleet managers, major contractors and owners of capital equipment, and represents a quality long term investment. Japanese design, engineering and manufacture, coupled with technology such as ECO, factory fitted Voltage Reduction Devices (VRD), Real Dual operator modes and onboard auxilliary Earth Leakage Circuit Breaker (ELCB) protected 240 /415V outputs upto 18kVA*, have your site requirements covered. All models are equipped with a standard auxiliary power supply to run your tools or lights.











your silent partner in business

Offices in Perth and Melbourne

Phone: **1800 SHINDAIWA** (1800 744 632); Email: sales@shindaiwa.com.au

www.shindaiwa.com.au



